

D2 DYNAMIC INSTRUMENT MICROPHONE

OVERVIEW:

Designed, machined, assembled and tested by Audix in the USA, the D2 is a dynamic instrument microphone used for stage, studio and broadcast applications. The D2 is characterized with a hypercardioid pickup pattern for isolation and feedback control and is equipped with a VLM™ (Very Low Mass) diaphragm for natural, accurate sound reproduction.

The D2 is lightweight, compact and easy to position. With a wide frequency response of 80 Hz - 18 kHz and the ability to handle sound pressure levels in excess of 144 dB, the D2 is an excellent choice for miking instruments with a percussive nature such as rack toms, congas, saxophone, guitar cabinets and brass.

The D2 includes a precision machined aluminum body, black anodized finish, laser etched model and serial number, steel mesh grill, Switchcraft® or Audix XLR connector and is supplied with a tension-fit heavy duty nylon mic clip.

Transformerless design, low impedance and balanced output allow for interference-free performance even with long cable runs.

SUPPLIED ACCESSORIES:

Tension-fit heavy duty mic clip (DCLIP)
Carrying pouch (P1)

OPTIONAL ACCESSORIES:

TRIPOD - Mic stand
DFLEX - All purpose percussion clamp
DVICE - Spring loaded rim mount clamp
DCLAMP - Tension rod mic clamp
CBL-20 - 20' XLR-XLR Low noise microphone cable
CBL-DR25 - 25' right angle XLR-XLR low noise microphone cable
STAND-KD - Adjustable short boom mic stand
CABGRABBER - Tension held mic holder, clamps to guitar cabinets
CABGRABBER-XL - Tension held mic holder, clamps to oversized guitar and bass cabinets and leslie bottoms



FEATURES:

Compact, lightweight
Machined aluminum body
VLM (Very Low Mass) diaphragm
Studio quality sound
Excellent mid-bass transient response
Handles extremely high SPL without distortion
Roadworthy construction
5 year warranty

APPLICATIONS:

Rack toms, congas, floor tom
Guitar and bass cabinets
Saxophone, brass




DCLAMP



DFLEX



DVICE & CBL-DR25 w/ D2



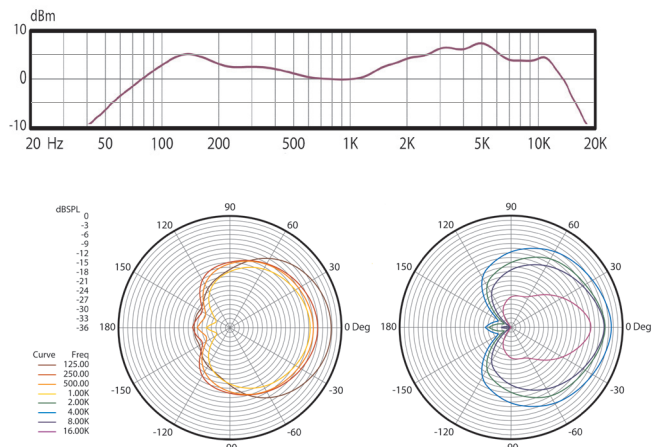
CAB GRABBER



STAND-KD

SPECIFICATIONS:

Transducer Type	Dynamic
Frequency Response	80 Hz - 18 kHz
Polar Pattern	Hypercardioid
Output Impedance	250 ohms
Sensitivity	1.2 mV / Pa @ 1k
Capsule Technology	VLM Type B
Off Axis Rejection	>30 dB
Maximum SPL	≥144 dB
Power Requirements	None
Connector	Switchcraft® or Audix male XLR connector
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector
Housing / Finish	Machined Aluminum / Black Hard Coat
Weight	128 g / 4.5 ounces
Length	100 mm / 3.9 inches

FREQUENCY / POLARS:

***All specifications subject to change without notice.

SERVICE AND WARRANTY:

This microphone is under warranty for a period of 5 years from any and all manufacturing defects. Should your microphone fail in any way, please contact the Audix Service department at 503-682-6933. A Return Authorization number is required before returning any products.

CARE AND MAINTENANCE:

The D2 is manufactured to exacting specs with roadworthy construction. However, the capsule is highly sensitive and should be handled with care. Avoid extreme temperatures and be sure to store your microphone in the pouch provided when not in use. Moisture of any kind can adversely affect the sound and performance of your microphone.

ARCHITECTS AND ENGINEERS SPECIFICATIONS:

The microphone shall be of the dynamic type operating on the moving coil principle and the capsule shall be VLM Type B. The polar pattern of the microphone shall be hypercardioid. The nominal output impedance shall be 250 ohms at 1 kHz. The microphone shall have a sensitivity of 1.2 mV / Pa at 1 kHz and will handle a sound pressure level of ≥144 dB. The microphone body shall be machined of aluminum and the grill cap shall be steel wire mesh. The overall dimensions shall be 21.5 mm in diameter at the base, 39 mm in diameter at the widest point and 100 mm in length. The microphone shall be the Audix D2.

OPERATION:

The D2 is a low impedance microphone and should be plugged into a "mic level" of your console, mixer, or recording device. Please note that your microphone does not require phantom power and will not be effected in any way by phantom power should it be running simultaneously while the microphone is in operation. Avoid plugging or unplugging the microphone from the PA system unless the channel is muted or the volume of the system turned down. Failure to do so may result in a loud "popping" noise which could seriously damage the speakers in the PA system.

USER TIPS:

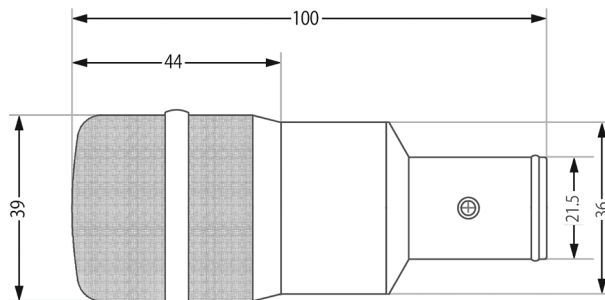
The D2 has an extremely tight (hypercardioid) pick-up pattern in order to help eliminate sound from other instruments on stage from "bleeding" into the microphone. For this reason, the D2 is exceptionally effective in capturing the sound of each component of a drum or percussion kit.

Drums, hand percussion: As a general rule, the bottom of the D2 grill should be 1-2 inches above the head of the drum and pointed towards the center. For more "ring" pull the mic back towards the rim. For less ring and more overtones, position the mic 1-2 inches inside the ring. For more attack, place the mic very close to the head and for more overtones and decay move the mic further away from the head.

Guitar cabinets: The D2 can be placed within 1-2 inches of the grill cover at a 90 degree angle pointing directly into the speaker. If the mic is placed closer to the edge of the speaker, you will minimize the higher frequencies and get a warmer, fatter tone. To capture more highs, move the mic closer towards the center of the speaker, but avoid the middle of the speaker.

Horns: Place the mic within 1-2 inches of the bell, especially when on a stage with drums, bass, guitar, etc. For jazz, classical, and music where the stage volume is lower, the mic can be placed further away for a richer, fuller sound.

*Further miking techniques may be found on our website at www.audixusa.com

DIMENSIONS (mm):

www.audixusa.com
503-682-6933 Fax: 503-682-7114

Audix Corporation 9400 SW Barber St. Wilsonville, OR 97070



1.1

AUDIX WARRANTY REGISTRATION FORM

Name: _____ Model: _____
Company: _____ Serial Number: _____
Address: _____ Store: _____
City: _____ Store Location: _____
Prov./State: _____ Zip: _____ Purchase Date: _____
Phone: () _____ Signature: _____
Email: _____ Date: _____

Please register your product online at www.audixusa.com or mail this form to:
Audix Microphones P.O. Box 4010 Wilsonville, OR 97070

Please Check all that apply:

☐ Male ☐ Female

Age:

- ☐ 18 or Under
☐ 19-25
☐ 26-35
☐ 36-45
☐ 46-55
☐ 55 +

Occupation:

- ☐ Musician
☐ Producer
☐ Sound Eng.
☐ Radio/TV
☐ Production
☐ Other _____

Primary Instruments:

- ☐ Vocal
☐ Guitar / Bass
☐ Drums
☐ Keyboard
☐ Brass
☐ Woodwinds
☐ Strings
☐ Other _____

Product to be used for:

- ☐ Pro live sound
☐ Pro recording
☐ Home recording
☐ Rehearsal
☐ Installation
☐ School
☐ House of Worship
☐ Other _____

How did you hear about Audix?

- ☐ Magazine Ad ☐ Online Ad
☐ On-line Store ☐ Friend
☐ Salesman ☐ Other _____

Do you own other Audix Products? ☐ Yes ☐ No

Model(s) _____

Have you visited the Audix website? ☐ Yes ☐ No