




Sub-bass extension for the GALEO XT.  
 Combined with the hybrid horn construction, two newly devised 21" woofers with a voice coil diameter of 135mm and a maximum range of 70mm (peak to peak) ensure a very high and undistorted level of bass within the usable range of 33 to 120 Hz.  
 The special housing design guarantees a long throw and low power compression for high-performance applications.




## PRODUCT SPECIFICATIONS

Speaker Components	2x 21" Nd
Description	Bass Extension for GALEO XT
Powerhandling - AES / Peak	3600 Watt / 10,8 kW
Impedance - nominal	2 Ω
SPL 1m - 1Watt / Peak	107dB / 146dB
Usable Range	33Hz - 120Hz
Tuning Frequency - Excursion min.	43Hz
Connectors	2x Neutrik Speakon 4-pol
	Coding: 1+/- HiMid, 2+/- Sub
Handles	4x 4D handle
Fittings	wheelboard fittings
Weight	89kg without wheelboard
	99kg inclusive wheelboard
Size - height x width x depth	60,0 x 110,0 x 107,0 cm
Order Number	00390

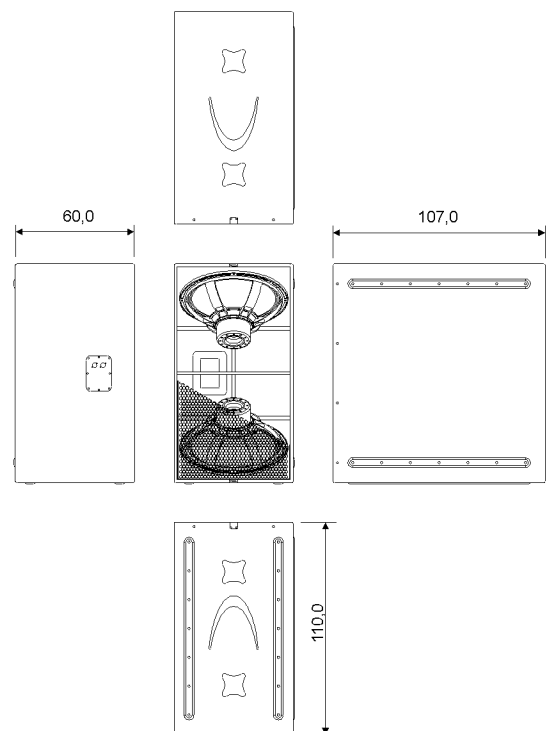



Robust melamine resin skids on the sides and bottom.

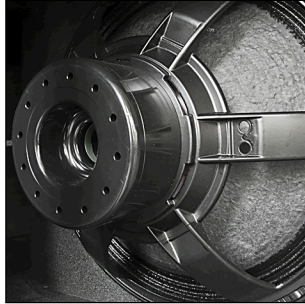

21" ND woofer with a voice coil diameter of 135 mm and a maximum excursion of 70 mm.




Honeycomb grid shell with acoustic foam on the inside for dust and splash protection.




Removable front cover with 100 mm Blue Wheels for convenient transportation.

Galeo XT Sub Frequency Response

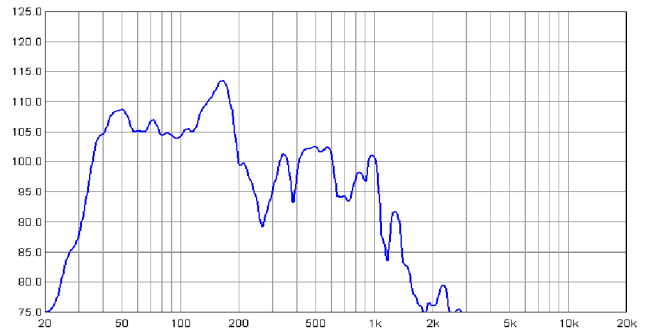

Galeo XT Sub Impedance curve

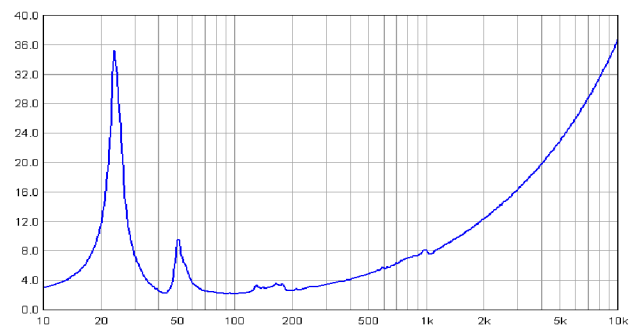

## Accessories



Wheelboard / Frontcover for Galeo XT Sub

Order number: 01272